

PCT

DE
PH 000237 EP MAT.
WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :

H04Q 7/38

A2

(11) International Publication Number:

WO 00/28760

(43) International Publication Date:

18 May 2000 (18.05.00)

(21) International Application Number: PCT/FI99/00925

(22) International Filing Date: 5 November 1999 (05.11.99)

(30) Priority Data:

982417

6 November 1998 (06.11.98)

FI

(71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; P.O. Box 300, FIN-00045 Nokia Group (FI).

(72) Inventors; and


(75) Inventors/Applicants (for US only): SALONEN, Janne [FI/FI]; Rantakoskelantie 3 A 2, FIN-90570 Oulu (FI). RINNE, Mikko [FI/FI]; Tallbergin puistotie 1 C 25, FIN-00200 Helsinki (FI). HONKASALO, Harri [FI/FI]; Haravakuja 12, FIN-01660 Vantaa (FI). RAJANIEMI, Jaakko [FI/FI]; Lapinrinne 2 A 11, FIN-00180 Helsinki (FI). AHMAVAARA, Kalle [FI/FI]; Ruostekuja 3 D 24, FIN-01610 Vantaa (FI).

(74) Agent: BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published


Without international search report and to be republished upon receipt of that report.



(54) Title: METHOD FOR CONTROLLING BEARER PROPERTIES

(57) Abstract

The invention concerns the control of connections in cellular telecommunication systems. According to the invention, the available radio resources are controlled by allowing only certain combinations of transport formats to be used by a single user. The inventive method restricts the combinations of bearer bit rates which can be used, without strictly limiting some bearers from using highest bit rates. This inventive approach allows flexible overall control of radio resources, while retaining the possibility of bearers to select between different bit rates.

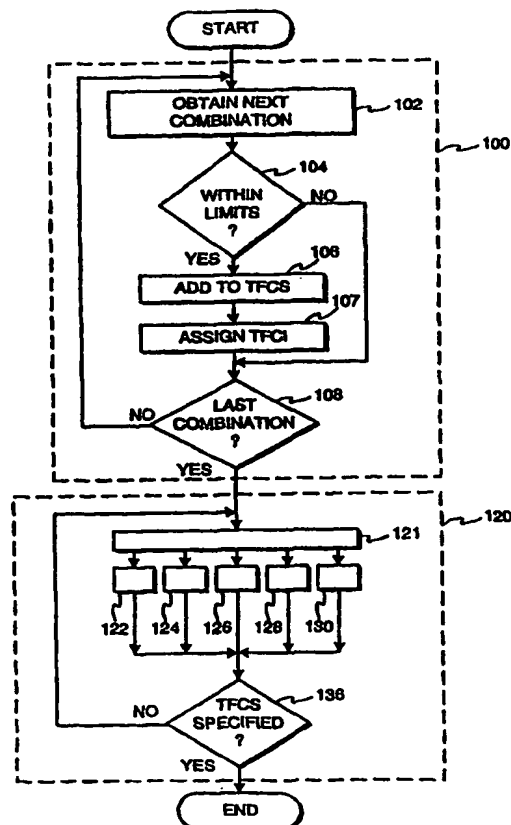

Best Available Copy

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Method for controlling bearer properties

TECHNICAL FIELD OF THE INVENTION

5

The invention concerns the control of connections in cellular telecommunication systems.

BACKGROUND OF THE INVENTION

10

In cellular telecommunication systems a single speech connection or data connection through the cellular telecommunication network is called a bearer. Generally, a bearer is associated with a set of parameters pertaining to data communication between a certain terminal equipment and a network element, such as a base station or an interworking unit (IWU) connecting the cellular network to another telecommunications network. The set of parameters associated with a bearer comprises typically for example data transmission speed, allowed delays, allowed bit error rate (BER), and the minimum and maximum values for these parameters. A bearer may further be a packet transmission bearer or a circuit switched bearer and support for example transparent or non-transparent connections. A bearer can be thought of as a data transmission path having the specified parameters connecting a certain mobile terminal and a certain network element for transmission of payload information. One bearer always connects only one mobile terminal to one network element. However, a bearer can pass through a number of network elements. One mobile communication means (ME, Mobile Equipment) may in some cellular telecommunication systems support one bearer only, in some other systems also more than one simultaneous bearers.

In the new cellular telecommunication systems such as the UMTS system (Universal Mobile Telecommunication System) under development, variable bit rate bearers will be in much more widespread use than in the present systems. Multiple simultaneous bearers with multiple bit rate options will result in high amount of combinations to be supported. It is desirable that also the air interface part of the communications system supports this kind of bearer combinations efficiently, i.e. without excessive use of radio resources. Since the bit rates of bearers may change from frame to frame, the bit rates need to be indicated in the frames. Assuming that all possible combinations of instantaneous bit rates of different bearers shall be supported, the amount of bits required for identification of the transmission rate of a

35

radio frame may become excessive. On the other hand, fixed allocation of radio resources according to the maximum possible total bit rate is not feasible. Maximum bit rates of the bearers may be rarely used and if the resources allocated for a user are dimensioned based on the worst case combination i.e. all bearers using the highest possible bit rate, scarce radio resources will be wasted.

SUMMARY OF THE INVENTION

An object of the invention is to realize a method for controlling the bearers, which allows the control of maximum total bit rate of all bearers of a user, while aiming to avoid as much as possible restrictions of use of the highest data rates by a bearer. A further object of the invention is to realize a method, which reduces the amount of data transmission needed for communicating the bit rates of bearers from a transmitting entity to a receiving entity.

The objects are reached by restricting the allowed bit rate combinations, associating an identifier with each allowed combination, and identifying the instantaneous transmission rate using the identifier associated with the particular combination.

The method according to the invention is characterized by that, which is specified in the characterizing part of the independent method claim. The system for controlling bearers in a cellular telecommunication system according to the invention is characterized by that, which is specified in the characterizing part of the independent claim directed to a system for controlling bearers in a cellular telecommunication system. The dependent claims describe further advantageous embodiments of the invention.

According to the invention, the available radio resources are controlled by allowing only certain combinations of transport formats to be used by a single user. The inventive method restricts the combinations of bearer bit rates which can be used, without strictly limiting some bearers from using highest bit rates. Consequently, depending on the available resources, one bearer may well use its highest data rate, possibly even more bearers than one, although the total resource usage of all bearers of the user may be restricted. This inventive approach allows flexible overall control of radio resources, while retaining the possibility for bearers to select between different bit rates.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is described in more detail in the following with reference to the accompanying drawings, of which

5

Figure 1 illustrates a method according to an advantageous embodiment of the invention,

10

Figure 2 illustrates another method according to an advantageous embodiment of the invention,

Figure 3 illustrates a system according to an advantageous embodiment of the invention, and

15

Figure 4 illustrates a further method according to an advantageous embodiment of the invention.

Same reference numerals are used for similar entities in the figures.

20 DETAILED DESCRIPTION

In the following discussion, the term bit rate refers to the bit rate after channel coding, i.e. the bit rate actually transmitted over the air interface, and not the payload data bit rate unless otherwise specified.

25

According to the present invention, transmission of a single mobile communication means is controlled by controlling the allowed bit rate combinations of the bearers of the mobile communication means. The allowed combinations of bearer bit rates are restricted in such a way, which does not refuse the possibility of using the highest bit rates for some bearers.

30

To aid in the description of the invention, certain terms are defined in the following.

35

A transport format (TF) is a set of parameters, which correspond to a single way of preparing a payload data stream for transmission over the air interface. The set of parameters indicate for example payload data rate, the error control coding method used, interleaving method used, and other processing methods used in the particular cellular telecommunications network, i.e. describe the physical layer processing

applied to the data to be transmitted. Consequently, each TF corresponds to a specific instantaneous bearer bit rate. Further, each bearer has at least one transport format. In the case of a bearer supporting for example multiple bit rates, a bearer can have more than one corresponding TF.

5

Each transport format has a corresponding transport format identifier (TFID). The TFIDs can be assigned to TFs in many ways, for example in ascending order starting from the lowest bit rate, or according to some other predefined rule.

- 10 The combination of transport formats of the active bearers is a Transport Format Combination (TFC). The set of all possible transport format combinations form a Transport Format Combination Set (TFCS). Each TFC has a corresponding transport format combination identifier (TFCI), i.e. each TFCI corresponds to a definite group of transport formats. The TFCI is used to inform the current
15 combination of transport formats to the receiver. The TFCI:s are preferably integer numbers.

A. Determination of allowed combinations

- 20 The determination about which combinations can be used and which cannot can be made on the basis of many different requirements according to the needs of the particular embodiment of the invention. Some examples of such requirements are given in the following.

25 A.1. An example of a limit: size of TFCI word

- In order to further reduce the amount of data transmission needed for transmission of transport format information over the air interface to the receiver, the size of the TFCI word can be changed. If the TFCI word has m bits, the maximum number N of
30 combinations that can be represented is $N = 2^m$. Consequently, the length of the TFCI word simply limits the number of allowed combinations. The length of the TFCI word can be adjusted to give a suitable compromise between use of transmission resources for transmitting the TFCI word and the variety of transport format combinations available. In an advantageous embodiment of the invention, the
35 length of the TFCI word can be changed during a connection.

A.2. An example of a limit: maximum bit rate for the user

In a further advantageous embodiment of the invention, maximum allowed bit rate of a user is used in the determination of allowed transport format combinations. In
5 such an embodiment, the allowed combinations include all transport combinations, whose total bit rate is less than or equal to the maximum bit rate for a user.

In various embodiments of the invention, the maximum bit rate may be user-dependent, some users having a different maximum limit from that of others. This
10 provides one way of prioritization of users, for example to provide high-paying users and otherwise prioritized users such as rescue workers a better service than to the rest of users.

A.3. Other grounds for combination decisions

In addition to the previously mentioned limits, other information can be used in making decisions about allowed transport format combinations. This kind of information may for example comprise priorities of the bearers, measured
15 throughputs for each bearer as well as the aggregate throughput for the user in question, current load in the cell and interference levels.

B. Construction of TFCS

The construction of the transport format combination set and the assigning of
25 transport format combination identifiers to the various combinations can be performed in many different ways. Some examples of these ways are presented in the following.

B.1 A first example

Preferably, a table of the allowed transport format combinations is constructed, whereby the table index can be used as the TFCl. Thereafter, only the table index
30 i.e. the TFCl needs to be communicated between the transmitter and the receiver. However, the invention is not limited to using tables, since other means such as linked lists or other data structures can be used for associating a transport format
35 combination and a TFCl.

B.2 A second example

Further, a predefined algorithm or rule can be used to generate the TFCI corresponding to a TFC, whereafter the TFCI found in this way can be used as the index to a table for storing the different allowed combinations. The TFCI of a TFC
 5 can be determined for example according to the following algorithm:

$$1. \text{factor} = L(K)$$

$$2. \text{TFCI} = \text{TFID}(K)$$

3. step through all values of j from $K-1$ to 1, repeating 3a and 3b:

$$10 \quad 3a. \text{TFCI} = \text{TFCI} + \text{TFID}(j) * \text{factor}$$

$$3b. \text{factor} = \text{factor} * L(j)$$

where

factor is a temporary variable used in the algorithm,
 15 $L(j)$ is number of TF:s for bearer j ,
 $\text{TFID}(j)$ is TFID of the TF of bearer j , and
 K is the number of active bearers.

This algorithm assumes that TFIDs are assigned to TFs in ascending order starting
 20 from the lowest bit rate, the first TFID being zero.

B.3 A third example

In a further advantageous embodiment of the invention, the TFCI values are
 25 assigned simply by iterating through all combinations of all transport formats of the bearers, checking for each combination whether the combination is allowed or not. If the combination is allowed, the next free TFCI value is assigned to the combination. For example, the allowed combination can be entered into the next free position in a table containing the TFCS, the index of the position then being the
 30 assigned TFCI.

B.4 A fourth example

In a still further advantageous embodiment of the invention, TFCI values are classified into two categories: active and inactive values. Active values are those values which are in use, and inactive values those that are not in use. In such an embodiment, new services can be taken into use by specifying the corresponding TFCI values to be active. If some transport format combinations are removed from use, the corresponding TFCI values are simply specified to be inactive. Such an embodiment has the advantage, that the timing of the changes in the TFCS and TFCI values is not very critical, since other active TFCI values remain unchanged. It is enough from the viewpoint of timing, that any new TFCI values are not used before the receiver has had enough time to receive the message specifying the new values and to change the TFCS and TFCI configuration. In such an embodiment, the message specifying that a TFCI value is now active may for example comprise also the specification of the TFC corresponding to the TFCI. In further embodiments of the invention, the TFC corresponding to a TFCI specified to be active may be previously known by the receiver, or may be deduced from the TFCI by the receiver according to a predefined rule. For example, all possible combinations of transport formats of the bearers can be stored in a table whose index values correspond to the TFCI values, and only those TFCI values are used, which are specified to be active.

B.5 A fifth example

In a further advantageous embodiment, the transport format combinations and the corresponding TFCI values are ordered according to the total bit rate of the TFC or some other desired criteria. In such an embodiment, the allowed transport format combinations are indicated simply by indicating the highest allowed TFCI. In such an embodiment, when a new TFC is allowed, the new TFC is inserted in the corresponding location in the ordered sequence of transport format combinations and given the TFCI value corresponding to that position in the sequence. The TFCI values are updated accordingly, i.e. the higher TFCI values are incremented by one. In a similar way, when a TFC is removed from use, it is removed from the ordered sequence, and the TFCI values are updated accordingly.

Preferably, the TFCI of the TFC with lowest bit rate is 0, the TFCI of the TFC with the next lowest bit rate is 1, and so on. However, this numbering scheme is not the only possible method that can be used in various embodiments according to the

section B.5 of this specification. Preferably, the TFCI values form a sequence of consecutive integer numbers.

5 The ordering of transport format combinations and the corresponding TFCI values may take into account also other parameters than the total bit rate of a TFC. For example, if more than one transport format combination has the same total bit rate, these combinations can be ordered according to their relative priority.

10 In this embodiment, a mobile station can request more resources simply by indicating a new desired highest allowed TFCI in the resource request, to which the network can reply by allocating more resources if possible, and returning a possibly new highest allowed TFCI limit.

15 C. Changing of the set of allowed transport formats

The transport format combination set (TFCS) needs to be known both to transmitter and receiver. Each time new variable rate bearer requires establishment of a connection or an old connection is released the TFCS is changed. Further, it may be desirable to restrict the use of certain combinations for some other reasons. To ensure that the transport format combination sets in the transmitter and in the receiver correspond to each other, the set or any changes to the set may need to be signalled from the transmitter to the receiver. Some ways to signal the TFCS according to various advantageous embodiments of the invention are described in the following.

25 C.1 Signalling of TFCS by explicit recitation

30 In an advantageous embodiment of the invention, the TFCS is signalled from a first end of a connection to a second end of the connection by explicitly reciting all allowed combinations. This embodiment is advantageous, if the number of allowed combinations is relatively small compared to the total number of combinations. In this embodiment, the first end sends one or more messages to the second end, which messages specify at least all allowed combinations, and for each combination specify one TFID at least for each bearer having more than one transport format.

35 In a further advantageous embodiment of the invention, the TFCS is signalled from a first end of a connection to a second end of the connection by explicitly reciting all those combinations, which are not allowed. This embodiment is advantageous, if

the number of non-allowed combinations is smaller than the number of allowed combinations. In this embodiment, the first end sends one or more messages to the second end, which messages specify at least all non-allowed combinations, and for each combination specify one TFID at least for each bearer having more than one transport format.

In a further advantageous embodiment of the invention, the message or messages specifying the allowed or non-allowed combinations, also specify whether the recited combinations are allowed or not. This allows the use of the same message type for specifying allowed and non-allowed combinations.

C.2 Signalling of the TFCS by indicating construction limits

In another advantageous embodiment of the invention, the end of the connection deciding about the allowed combinations informs the other end of the connection only about which limits and other information are to be used in construction of the TFCS. Such a limit may be for example the maximum total bit rate of a single user, and such other information may be for example the priorities of the bearers. Thereafter, the other end constructs the TFCS independently following the specified limits. Since the same limits are used at both ends, the resulting TFCS will be the same. The construction of the TFCS may proceed for example by going through all possible transport format combinations, and checking for each one whether the combination is allowed or not.

C.3 Signalling of the TFCS by indicating specific transport formats

If the restriction of the combinations is to be done in such a way that some transport formats of some bearers are not used in any of the allowed combinations, the TFCS can be specified with bearer specific messages restricting the use of one or more transport formats of a specific bearer.

In a further advantageous embodiment of the invention, the TFCS is specified with bearer specific messages indicating, which transport formats can be used.

C.4 Further methods

The previous methods have given examples of methods, in which the TFCS is constructed from scratch by indicating allowed or non-allowed transport formats or

combinations of transport formats. However, a new TFCS may also be defined by specifying the changes in the allowed transport format combinations and transport formats relative to the previous TFCS. The messages may specify whether the item being specified is to be allowed or restricted. The item being specified in a message may be for example a TFC, a bearer, or a single transport format of a bearer. For example, the new TFCS may be specified by a message, which restricts the use of one or more transport formats of a specific bearer.

After specifying the changes in the allowed combinations, transport formats and/or bearers, the TFCS is preferably reconstructed so that the TFCS contains only allowed combinations, and the TFCI values updated to correspond to the new TFCS.

The previously described ways of specifying the TFCS to a receiver are examples only and do not limit the invention in any way. Many other ways of specifying a set of combinations or for example different combinations of the previously described ways can as well be used in various embodiments of the invention.

D. Time of validity

In the previous examples of specifying the TFCS, the message or messages carrying the specifying information of TFCS may also comprise an indication of the starting time, after which the new TFCS is valid. However, the starting time of validity may also be defined implicitly, e.g. the new TFCS may be valid from the time the specifying message arrives or in the case of more than one message being used to specify the TFCS, from the receiving time of the last of these messages.

E. Examples of admission control methods according to the invention

The cellular telecommunications network can use for example the previously described TFCS construction limits at least partly as the admission condition in an admission control method. For example, the system can determine how many TFCI bits would be required to represent all combinations in the TFCS based on the size of the TFCS and the transport formats of all the bearers. If the amount of TFCI bits is less than equal to a maximum TFCI word length, the network can then refuse the bearer request, or for example in the case of a high priority request, refuse the service from other already established bearers. As another example, the maximum

bit rate limit may be considered. In such an example, the bearer is advantageously admitted, if at least some of its transport formats result in an allowed combination. Consequently, a multi-bit-rate bearer may be only partially admitted, i.e. admitted with a restricted selection of bit rates.

5

If the requested bearer has higher priority than some other bearers, the cellular network preferably allocates resources for the higher priority bearer first and restricts the bit rates of the other bearers to such values, that the resulting TF combination is an allowed combination. This may result in the adjustment of transport format for a bearer having a lower priority, or even refusing the service for a bearer having a lower priority.

10

Each bearer requiring establishment of a connection preferably indicates the variability of the user bit rate in a predefined way, e.g. using a predefined signalling procedure. The network then determines transport formats for the requested bearer and updates the TFCS accordingly, if the network can provide service for the bearer or for at least some of its transport formats.

15

Figure 1 shows the flow diagram of an advantageous embodiment of the invention.

20

Figure 1 illustrates one example of the use of the inventive method in admission control. In step 135, a bearer request is received. As a response to the request, a TFCS is constructed in step 100. The step 100 of construction of a TFCS may also take into account the priority of the requested bearer as described previously. After the TFCS is constructed, it is checked in the following step 140 if the bearer belongs to any allowed combination. If the bearer is not a part of any allowed combination, the bearer is refused at step 150, after which the method is ended without taking the newly constructed TFCS into use. If the bearer is found to be a part of at least one TFC, the bearer is admitted in step 145. At the next step 120, the new TFCS is communicated to the receiver, after which the communicated TFCS is taken into use at step 155, after which the method is ended.

25

30

In further advantageous embodiments of the invention, the admission requirement may be different from the example of step 140 of Figure 1. For example, the bearer may be allowed only, if at least one transport format of the bearer is allowed in all combinations. Further, the bearer may also be allowed, if at least one transport format of the bearer is allowed in at least a predefined part of all combinations. In a further advantageous embodiment of the invention, a real time bearer is allowed only, if the highest transport format of the bearer is allowed in at least one TFC.

35

F. An example of a method

In the following, an example of a method according to an advantageous embodiment of the invention is presented. The method is described with reference to Figure 2,
5 which illustrates as a flow diagram the construction 100 of a transport format combination set and the communication 120 of information to the receiver for construction of the same set at the receiver.

10 In this example, the step of construction 100 of a TFCS comprises the following steps 102, 104, 106, 107, and 108. All combinations are examined one by one, starting with step 102, in which the next, or at the first time after start of the method, the first combination is taken into consideration. In step 104 it is checked, whether the combination is within the predefined limits, such as within a predefined maximum total bit rate limit. If the combination is within the limits, the combination
15 is added to the TFCS at step 106, and a TFCI is assigned to the combination in step 107. If the combination is not within the limits, the method is continued directly at step 108. In either case, in step 108 it is checked if the combination is the last one to be considered. If the combination is not the last one, it is returned back to step 102. If the combination is the last one, the method is continued at step 120.

20 In this example, the step of communication 120 of information to the receiver for construction of the set at the receiver comprises the following steps 121, 122, 124, 126, 128, 130, and 136. At step 121, the way of communicating the TFCS to the receiver is chosen. In this example, the steps 122, 124, 126, 128, 130, and 136
25 represent different ways of communicating the TFCS. At step 122, each allowed transport format combination is communicated to the receiver. At step 124, each non-allowed transport format combination is communicated to the receiver. At step 126, predefined limits for construction of the TFCS are communicated to the receiver. At step 128, information specifying at least one transport format of at least
30 one bearer, which at least one transport format of at least one bearer is not a part of any allowed transport format combination is communicated to the receiver. At step 130, differences between the TFCS being communicated and a previous TFCS are communicated to the receiver.

35 The steps 122, 124, 126, 128, and 130 may comprise communication of all necessary information at one method step, or communication of only part of all necessary information. Therefore, at step 136 it is checked if the whole TFCS has been specified. If the whole TFCS has not been specified, it is returned back to step

121 for continuing the communication of the TFCS to the receiver. If the whole TFCS has been specified, the method is ended.

5 In the step 107 of assigning a TFCI to a combination, the assignment may be performed simply by assigning the next free TFCI value for the combination. Any other method or predefined rule of assigning TFCI values can be used, for example any of those described in the previous section B in this specification.

10 G. An example of a system

Figure 3 illustrates an example of a system according to an advantageous embodiment of the invention. Figure 3 shows mobile communication means 505, base stations 510, a network element 520 and the rest of a cellular telecommunications network 550. The network element 520 may be for example a
15 radio network controller (RNC) of the UMTS cellular telecommunications network. The network element further comprises a processing unit 521 such as a microprocessor and a memory element 522 for storing programs for the processing unit and one or more transport format combination sets.

20 Further, according to this example the system comprises means 521 for construction of a set of allowed transport format combinations in a network element of the cellular telecommunication system, and means 521, 510 for communication of a constructed set of allowed transport format combinations to a mobile communication means 505.

25 During construction of a TFCS, the processor unit 521 performs the previously described checking whether a single transport format combination is within the predetermined limits. The processor unit 521 can perform this task by executing a program 523 stored in the memory means 522, which program directs the processor
30 unit to perform the task. If a transport format combination is found to be within the limits, the processor unit 521 adds the combination to the set of allowed transport format combinations 529 stored in the memory means 522. Preferably, the processor unit also assigns a transport format combination identifier (TFCI) to each transport format combination. The transport format combination identifiers can also be stored
35 in the memory means 522.

The processor unit 521 can also take care of the communication of the constructed TFCS to the receiver, in this case the mobile communication means 505 with the

help of other components of the cellular telecommunications network such as base stations 510. The previously described method steps, such as for example determining non-allowed transport format combinations or searching the differences between a transport format combination set and said previously stored second set of allowed transport format combinations can be realized using a program 524 stored in the memory means 522, which program directs the processing unit 521 to perform the method step. Further, the system may store more than one TFCS in the memory means, such as a previously constructed TFCS 529b, which can be used for example in determining the differences between a newly created TFCS and a previously created and communicated TFCS, after which a new TFCS can be communicated to the receiver simply by communicating the differences between the old and new TFCS. The receivers 505 store the communicated TFCS 506 in a memory means in the receiver, whereafter they are able to determine the current transport format combination on the basis of a received TFCI.

Preferably, the system also comprises means for assigning a transport format combination identifier to each transport format combination stored in said memory element. These means may comprise for example the processing unit 521, which can assign TFCI values to transport format combinations for example according to any of the embodiments of the invention described previously.

Preferably, the system also comprises means for sending a transport format combination identifier for identifying the transport formats used in a transmission. These means may comprise for example the processing unit 521, which can add the TFCI of the currently used TFC into the data transmitted to a receiver.

In an advantageous embodiment of the invention, also a mobile communication means 505 can comprise the means 521, 522, 523, 524, 525, 529, and 529b, or other means providing similar functionality. Although conventionally it is the network which decides about radio resource usage, the mobile communication means preferably has the capability and functionality needed for construction of a TFCS for example, according to the embodiments of the invention described in section C.2 in this specification, or according to other rules and limits set by the network.

H. A further example of a method

The TFCI values can be used to indicate, which transport formats are used in a transmission. For example, a TFCI value can be transmitted in each transmission

frame to describe the transmission format or transmission formats used in the frame. In another exemplary embodiment, a TFCI value can be transmitted each time, when the transport format combination is changed. Figure 4 illustrates one example of signalling according to an advantageous embodiment of the invention. Figure 4
5 illustrates events during communication between a transmitting party and a receiving party, such as, respectively, a mobile communication means and a base station of a cellular telecommunications network. First, a TFCI is sent from the transmitter to the receiver in step 610 for indicating, which transport formats are used in the next unit of transmission. In the next step 615, data is transmitted from
10 the transmitter to the receiver, using the transport formats specified by the TFCI value transmitted in the previous step. In various embodiments of the invention, the order of sending of the TFCI value and the data which the TFCI value refers to, does not necessarily need to be that shown in figure 4. For example, in such systems in which data is transmitted in frames, such as in the GSM system, the TFCI value
15 can be sent in the same transmission frame as the data which the TFCI value refers to, in which case the exact order of the data and the TFCI value is not important and can be set according to the requirements of the particular application.

I. Further considerations

20 In some advantageous embodiments of the invention, the TFCS used for transmission by a party and the TFCS used for reception by the same party do not need to be the same. This is advantageous for example when the amount of radio resources reserved for uplink communication is different from the amount of radio
25 resources reserved for downlink communication. Such a situation is possible for example in the HSCSD (High Speed Circuit Switched Data) mode in GSM networks. Such an arrangement is advantageous for example in data terminal use when browsing information databases or the Internet, where only short requests are transmitted from the mobile communication means, but large amounts of
30 information are returned from the data networks. In such embodiments of the invention, a communicating party preferably has at least two transport format control sets, one of which is used for reception and one for transmission.

35 In a further advantageous embodiment of the invention, multiple transport format combination sets are used to further reduce transport format signalling between a receiver and a transmitter. In such an embodiment, a plurality of transport format combination sets is constructed and communicated to the receiver, after which the current TFCS to be used is selected simply by sending a TFCS identifier to the

receiver. Such an embodiment reduces signalling over the air interface in such a case, in which some transport format combination sets are used relatively often. The plurality of transport format combination sets preferably comprises such sets, which are constructed as a result of most common bearer sets and limits, such as the maximum total bit rate for a user.

In such a case, when the allowed transport format combinations are limited by certain limits, which allow straightforward determination of allowability for a TFC, and the TFCI values are constructed according to a certain rule, explicit construction of a TFCS is not necessary for both parties of the connection. For example, the transmitting party may simply check if a new TFC is allowable according to the limits, and if the TFC is allowed, use the TFC in transmission, generating the TFCI on the fly. The receiving party can then use the TFCI as an index to a table containing the TFCS or, if the transport formats can be deduced from the specified TFCI using an inverse of the rule used for generating the TFCI, determine the used transport formats directly from the TFCI. Therefore, the existence of an explicit TFCS is not necessary in all embodiments of the invention.

In some circumstances, as a result of some kind of an error situation, it may be possible that the receiver and the transmitter have assigned the same TFCI to different transport format combinations. If such an error situation occurs, data transmission does not succeed, since the receiver attempts to interpret the received data stream in a different way than the data stream was constructed. Recovery from such an error situation can proceed in many ways in various embodiments of the invention. For example, according to one advantageous embodiment of the invention, the party which detects the error, informs the other end about the error, whereafter both ends reconstruct their TFCI values for example according to some of the previously described examples, such as those described in sections B.2 or B.3, after which the meaning TFCI values should be the same at both ends. According to another embodiment, the party detecting the error communicates its TFCS and TFCI values to the other party, which takes the communicated values into use. According to a third embodiment, if a mobile communication means detects the error, it requests the network to send the TFCS and the TFCI values used by the network and if the network detects the error, it sends the TFCS and the TFCI values used by the network preferably without waiting for the mobile communication means to request for the information.

- In various examples of embodiments described in this specification, the transport formats have been classified as allowed or non-allowed. However, in some embodiments of the invention, a bearer having no allowed transport formats in a TFC can be assigned a null transport format, i.e. a transport format having a zero bit rate. Therefore, a null transport format corresponds to a non-allowed transport format. Therefore, in this specification and the accompanied claims the term allowed transport format refers to a non-null transport format, i.e. a transport format with an essentially nonzero bit rate, which can be used in the TFCS.
- 10 The present invention reduces the use of radio resources, while retaining flexibility in the use of different transport formats. The present invention allows restriction of the use of radio resources without making it impossible for some bearers to use high data rates. The flexibility of the inventive method allows such overall control of radio resources, while providing a way to specifically restrict certain specific
- 15 services as well.

- In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention. While a preferred embodiment of the invention has been described in detail, it should be
- 20 apparent that many modifications and variations thereto are possible, all of which fall within the true spirit and scope of the invention.

Claims

1. Method for controlling bearers in a cellular telecommunication system,
characterized in that the method comprises steps, in which
 - 5 - a set of allowed transport format combinations is constructed, and
 - information for construction of said set at a receiver is communicated to the receiver.
2. A method according to claim 1, characterized in that
 - 10 said set of allowed transport format combinations is constructed by checking for each transport format combination, whether the combination is within predefined limits.
3. A method according to claim 1, characterized in that
 - 15 a transport format combination identifier is assigned to each combination of said set of allowed transport format combinations.
4. A method according to claim 3, characterized in that
 - 20 said assigning of transport format combination identifiers is performed according to a predefined rule.
5. A method according to claim 4, characterized in that
 - 25 said set of allowed transport format combinations is ordered according to at least the total bit rate of the transport format combinations, and said transport format combination identifiers are assigned so that the identifiers form a sequence of consecutive integer numbers.
6. A method according to claim 1, characterized in that
 - 30 said step of communicating information for construction of said set comprises the step of communicating of each allowed transport format combination to said receiver.
7. A method according to claim 1, characterized in that
 - 35 said step of communicating information for construction of said set comprises the step of communicating of each non-allowed transport format combination to said receiver.

8. A method according to claim 1, characterized in that said step of communicating information for construction of said set comprises the step of communicating at least one limit for construction of said set to said receiver.

5 9. A method according to claim 1, characterized in that said step of communicating information for construction of said set comprises the step of communicating information specifying at least one transport format of at least one bearer, which at least one transport format of at least one bearer is not a part of any allowed transport format combination.

10

10. A method according to claim 1, characterized in that said step of communicating information for construction of said set comprises the step of specifying the differences between said set to a previous set of transport format combinations.

15

11. A method according to claim 1, characterized in that a bearer request is admitted, if at least one of the transport formats of the requested bearer is a part of an allowed transport format combination.

20

12. A method according to claim 3, characterized in that transport formats used in a transmission between a receiver and a transmitter are identified by sending a transport format combination identifier from the transmitter to the receiver.

25

13. A method according to claim 3, characterized in that if either party of the connection detects that the transport format combination identifiers of the receiver do not correspond to the transport format combination identifiers of the transmitter, the transport format combination identifiers are reconstructed at at least one party of the connection.

30

14. A method according to claim 13, characterized in that said step of reconstruction comprises the reconstruction of transport format combination identifiers at both parties of the connection according to a predefined rule.

35

15. A method according to claim 13, characterized in that in said step of reconstruction, one of the parties of the connection communicates its

transport format combination identifiers to the other party, which takes the communicated identifiers into use.

16. System for controlling bearers in a cellular telecommunication system

5 characterized in that the system comprises

- means for construction of a set of allowed transport format combinations in a network element of the cellular telecommunication system, and
- means for communication of a constructed set of allowed transport format combinations to a mobile communication means.

10

17. A system according to claim 16, characterized in that said means for construction of a set of allowed transport format combinations comprises

- a memory element for storing a set of allowed transport format combinations,
- 15 - means for checking whether a single transport format combination is within predetermined limits, and
- means for adding a single transport format combination to said set of allowed transport format combinations stored in said memory element.

20 18. A system according to claim 16, characterized in that said means for communication of a constructed set of allowed transport format combinations to a mobile communication means comprises means for determining non-allowed transport format combinations.

25 19. A system according to claim 16, characterized in that the system further comprises means for storing a previously constructed second set of allowed transport format combinations, and said means for communication of a constructed set of allowed transport format combinations to a mobile communication means comprises
30 means for searching the differences between a transport format combination set and said previously stored second set of allowed transport format combinations.

20. A system according to claim 16, characterized in that the system further comprises means for assigning a transport format combination identifier to each
35 transport format combination stored in said memory element.

21. A system according to claim 16, characterized in that the system further comprises means for sending a transport format combination identifier for identifying the transport formats used in a transmission.

1 / 3

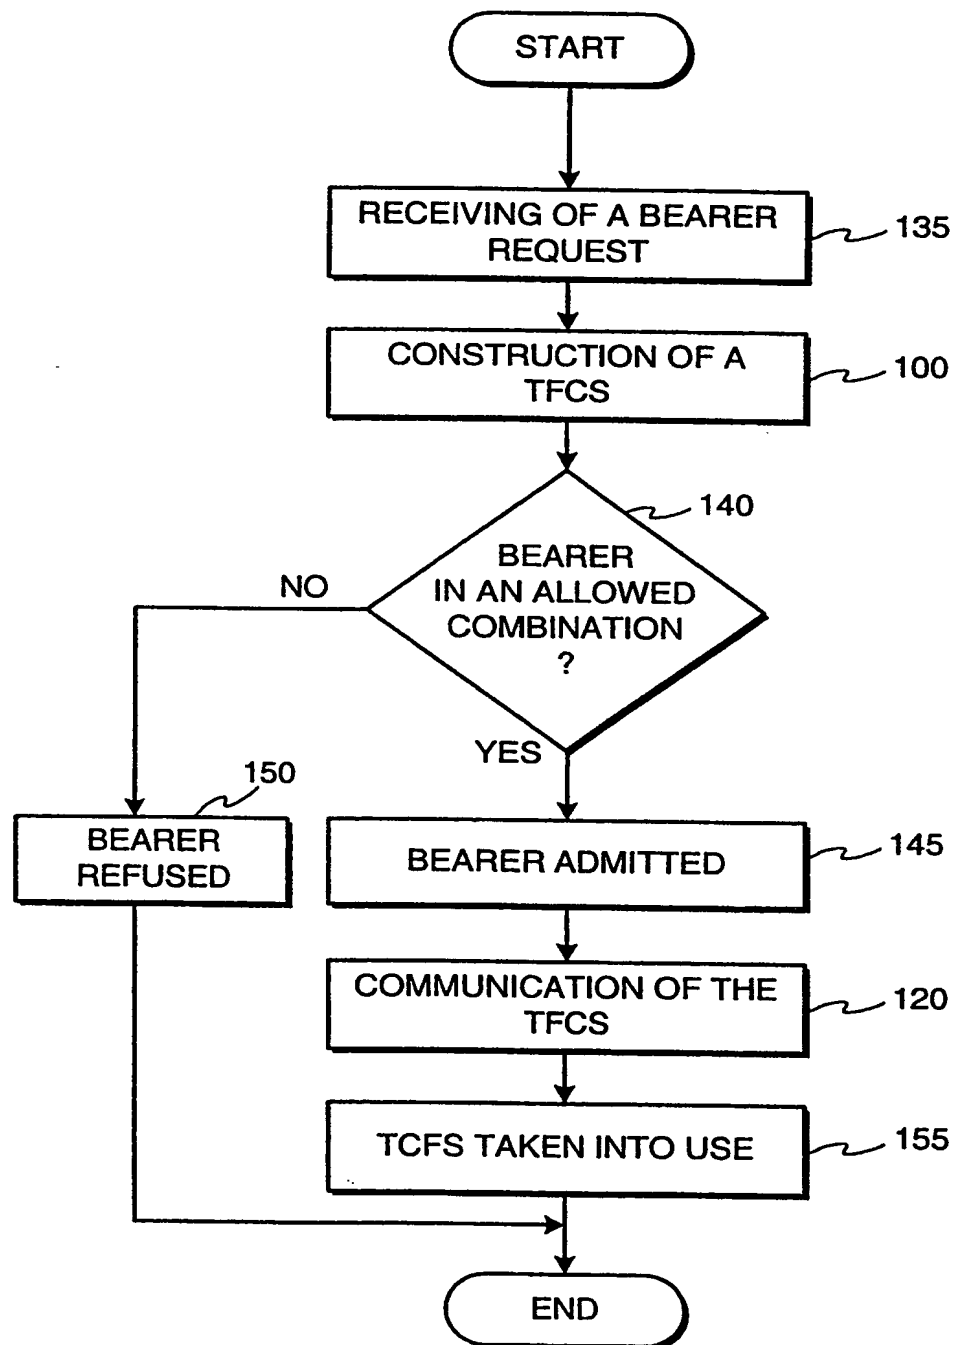


Fig. 1

2 / 3

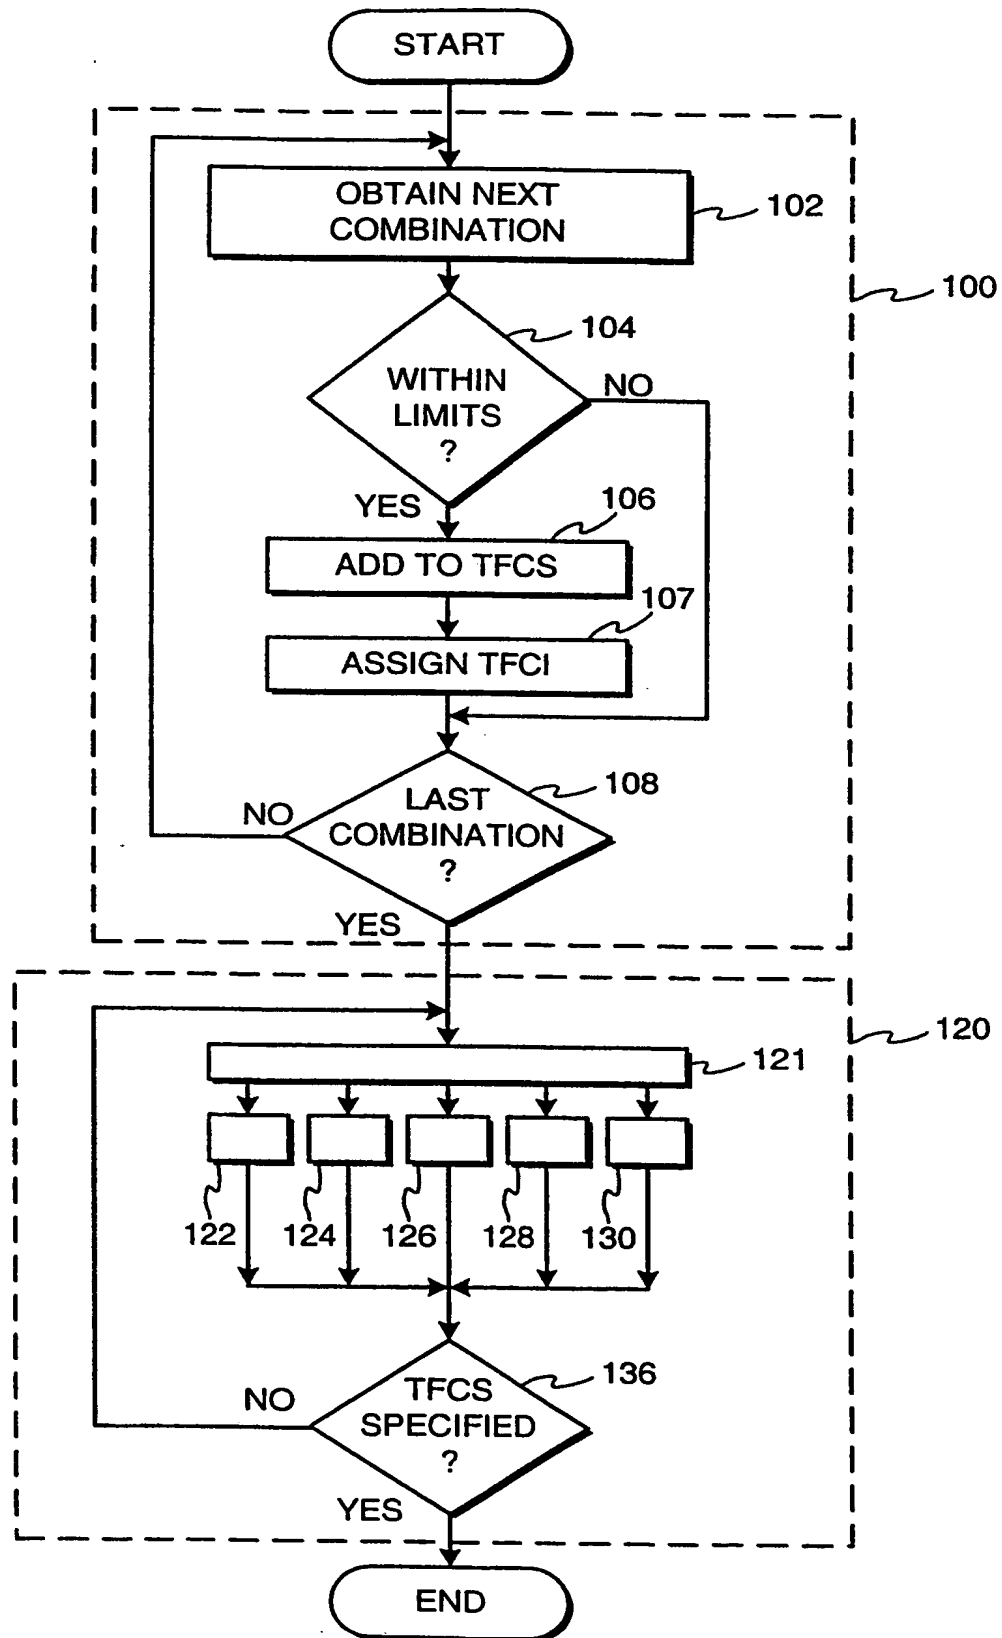


Fig. 2

3 / 3

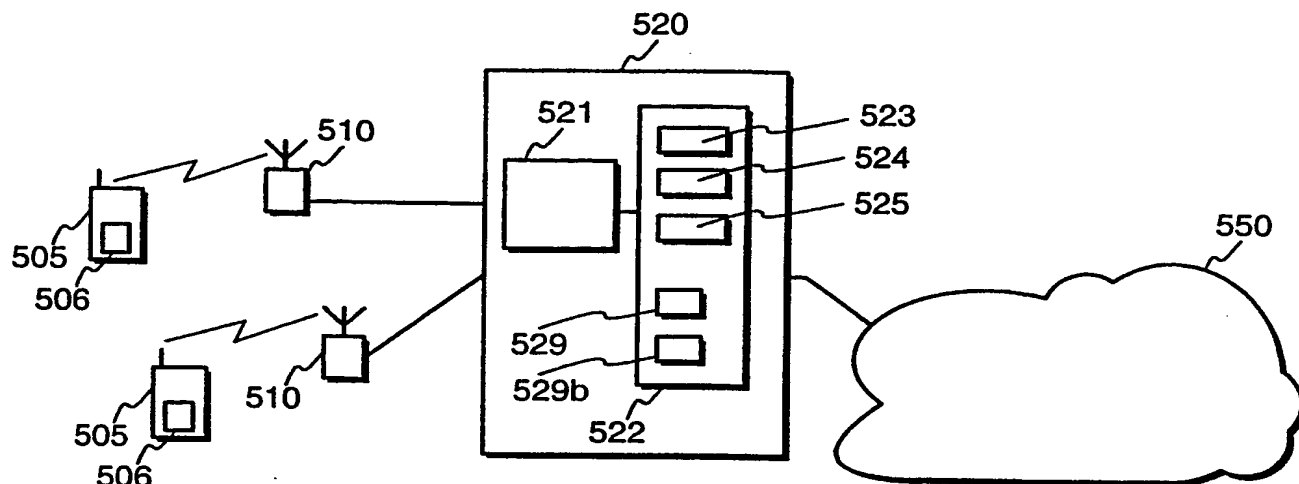


Fig. 3

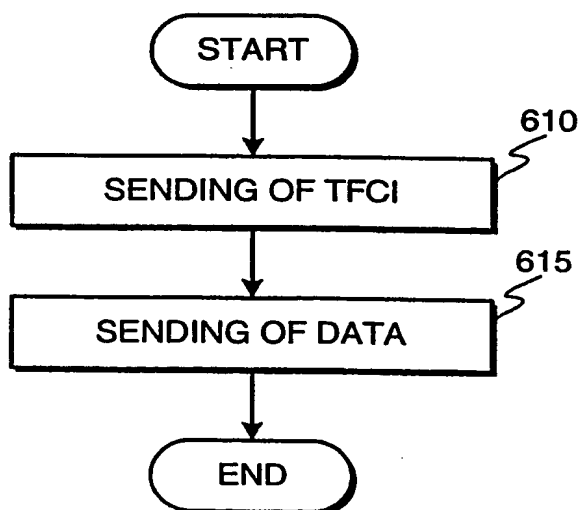


Fig. 4




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04Q 7/38		A3	(11) International Publication Number: WO 00/28760
			(43) International Publication Date: 18 May 2000 (18.05.00)
(21) International Application Number: PCT/FI99/00925		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 5 November 1999 (05.11.99)		Published With international search report.	
(30) Priority Data: 982417 6 November 1998 (06.11.98) FI		(88) Date of publication of the international search report: 3 August 2000 (03.08.00)	
(71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; P.O. Box 300, FIN-00045 Nokia Group (FI).			
(72) Inventors; and (75) Inventors/Applicants (for US only): SALONEN, Janne [FI/FI]; Rantakoskelantie 3 A 2, FIN-90570 Oulu (FI). RINNE, Mikko [FI/FI]; Tallbergin puistotie 1 C 25, FIN-00200 Helsinki (FI). HONKASALO, Harri [FI/FI]; Haravakuja 12, FIN-01660 Vantaa (FI). RAJANIEMI, Jaakko [FI/FI]; Lapinrinne 2 A 11, FIN-00180 Helsinki (FI). AHMAVAARA, Kalle [FI/FI]; Ruostekuja 3 D 24, FIN-01610 Vantaa (FI).			
(74) Agent: BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).			

(54) Title: METHOD FOR CONTROLLING BEARER PROPERTIES

(57) Abstract

The invention concerns the control of connections in cellular telecommunication systems. According to the invention, the available radio resources are controlled by allowing only certain combinations of transport formats to be used by a single user. The inventive method restricts the combinations of bearer bit rates which can be used, without strictly limiting some bearers from using highest bit rates. This inventive approach allows flexible overall control of radio resources, while retaining the possibility of bearers to select between different bit rates.

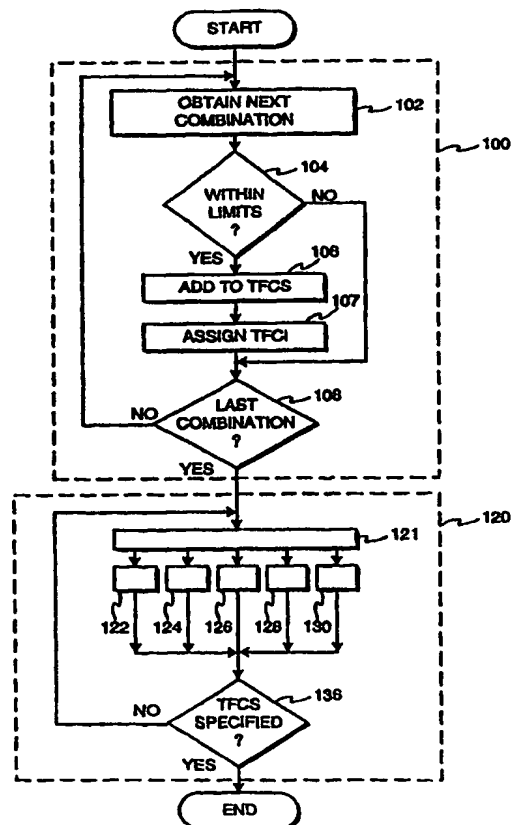

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00925

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	EP 0954187 A1 (NOKIA MOBILE PHONES LTD.), 3 November 1999 (03.11.99), column 4, line 24 - line 37; column 5, line 27 - line 57, abstract --	1,16
P,A	WO 9939528 A1 (NOKIA TELECOMMUNICATIONS OY), 5 August 1999 (05.08.99), abstract --	1,16
E,A	EP 0981229 A2 (LG ELECTRONICS INC.), 23 February 2000 (23.02.00), abstract --	1,16

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 April 2000

Date of mailing of the international search report

24 05. 2000

Name and mailing address of the International Searching Authority
European Patent Office P.B. 5818 Patentlaan 2
NL-2280 HV Rijswijk
Tel(+31-70)340-2040. Tx 31 651 epo nl.
Fax(+31-70)340-3016

Authorized officer

Jaana Raivio/cs
Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00925

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	WO 9952307 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 14 October 1999 (14.10.99), page 4, line 6 - page 6, line 4 --	1,16
P,A	WO 9949684 A2 (SIEMENS AKTIENGESELLSCHAFT), 30 Sept 1999 (30.09.99), abstract --	1,16
A	EP 0836291 A2 (NORTHERN TELECOM LIMITED), 15 April 1998 (15.04.98), abstract -- -----	1,16

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/FI 99/00925

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
EP	0954187	A1	03/11/99	FI 980923 D WO 9956437 A	00/00/00 04/11/99
WO	9939528	A1	05/08/99	FI 3556 U FI 980208 D,V	31/08/98 27/04/98
EP	0981229	A2	23/02/00	NONE	
WO	9952307	A1	14/10/99	US 5923592 A	13/07/99
WO	9949684	A2	30/09/99	NONE	
EP	0836291	A2	15/04/98	GB 9621333 D JP 10136441 A	00/00/00 22/05/98

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)